



byko-spectra pro

Light Booths and Luminaires

Operating Manual

Table of Contents

1	Security Information	5
2	Introduction	8
2.1	Functions and Characteristics	9
2.2	Components	10
3	Assembly	12
3.1	Light Booth Assembly	13
3.2	Luminaire Installation	16
3.3	Power On	19
3.4	Main Menu	20
4	System Setup	21
4.1	Administration (ADMIN)	22
4.1.1	ADMIN_OWNER	22
4.1.2	ADMIN_SYS	24
4.1.3	ADMIN_RLAMP	26
4.1.4	ADMIN_PROFL	29
4.1.5	ADMIN_OPER	32
4.1.6	ADMIN_TIME	34
4.1.7	ADMIN_RESET	35
4.2	User	36
4.3	Chain	37
4.4	Report	39
5	Operation	41
5.1	Choose the Light Source	42
5.2	Auto Sequence	43
5.3	Remote Control	43
6	Appendix	45
6.1	General Maintenance	46
6.2	Troubleshooting	50
6.3	Specifications	51
6.4	Declarations	52
6.5	About Us	54

1

Security Information

Maintenance and Cleaning

Clean properly

Wipe the device with a clean, white lint-free cloth. Do not use any liquid cleaners or agents containing wax, which will change color, reflectance, and gloss properties of the device. Clean outer surfaces with a damp cloth containing a mild soap. Do not spray or drop water into the equipment.

Carefully handle the lamp and daylight filter

Wait for the lamps or daylight filter to cool down before handling them. Use lens paper or similar products to handle the lamps since fingerprints and oils will affect the performance of the lamp.



WARNING: Ultraviolet light!

When using the UV light avoid looking directly at the light or exposing skin to rays of the light.



WARNING: High heat!

Diffusion glass, vents, filters and lamps will be very hot during operation. Keep your hands away from the device until it has cooled down.



WARNING: Electric shock!

Do not attempt to open any parts of the device. Consult with a trained BYK-Gardner technician.

Warranty Information


The warranty period for the instrument is 12 months (from the day when you have the invoice). If any fault occurs during this period, as the result of normal use, the repair will be free-of-charge.

The above warranty statement above does not apply when damage was caused by the following operations:

- a) The operating instructions of this manual were not followed.
- b) Using accessories and spare parts, which were not provided by BYK-Gardner.
- c) The device was serviced or repaired by someone other than a BYK-Gardner factory trained technician.

2


Introduction

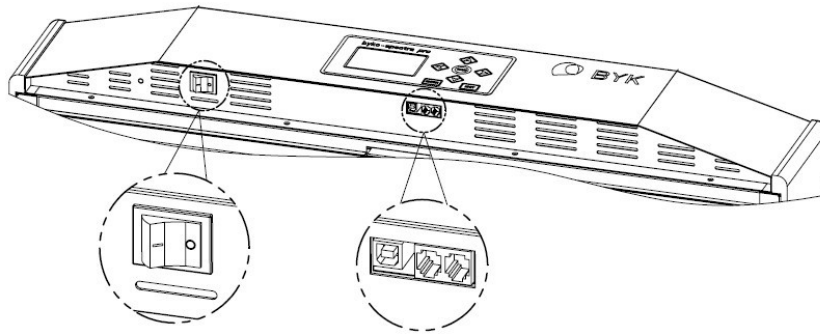

Power switch / USB port and cascade ports




USB cable: Connect light booth to PC to update software or get report data




Cascade cable. For cascading light booths to control their performance




Remote controller: Control light booths remotely



Snap hooks



Backup fuses

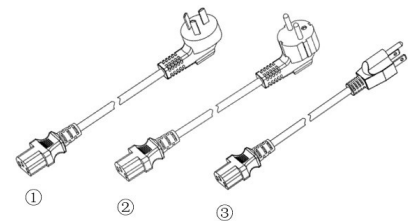

Power cord (one of three):

- ①. CHINA power cord
- ②. Europe power cord
- ③. US power cord

3

Assembly

4

System Setup

