


Grind Gages – μm or mils with extra deep grooves, 2 paths

Fineness of Grind Gages

Also called grind gages and Hegman gages. Many types of solid materials must be ground or milled into finer particles for dispersion in appropriate liquid vehicles. The physical properties of the resulting dispersions, often called “grinds”, depend not only on the actual size of the individual particles, but also on the degree to which they are dispersed.

The Fineness of Grind Gage is used to indicate the fineness of grind or the presence of coarse particles or agglomerates in a dispersion. It does not determine particle size or particle size distribution.

Grind gages are used in controlling the production, storage, and application of dispersion products produced by milling in the paint, plastic, pigment, printing ink, paper, ceramic, pharmaceutical, food, and many other industries.

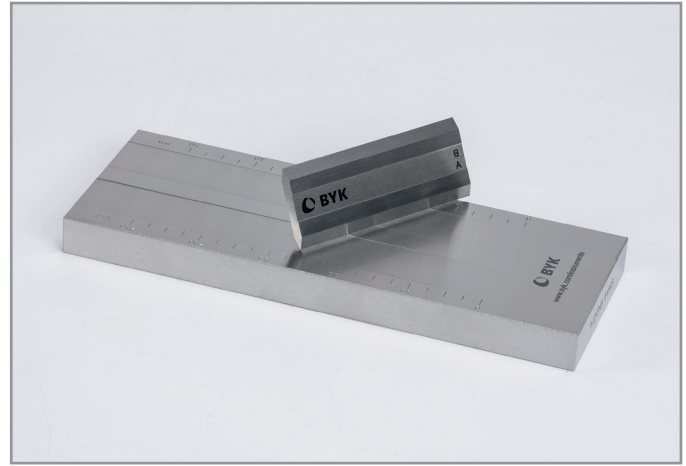

Working principle

The Fineness of Grind Gage is a flat steel block in the surface of which are two flat-bottomed grooves varying uniformly in depth from a maximum at one end of the block to zero near the other end. Groove depth is graduated on the block according to one or more scales used for measuring particle size.



Available Scales

Different Grindometers with different scales are available. These are equipped with Micrometer and Mil scales. These scales are explained below:

1.) Micrometer

One micrometer is one thousandth of a meter.

2.) Mil

One Mil (or thou) is one thousandth of an inch. It is equivalent to 25.3 μm

Standards

In compliance with:
 ASTM D333
 ASTM D1210
 ASTM D1316
 ASTM D6846
 ISO 1524
 FTMS 141a
 Method 4411.1



Catalog Number	Short Description	Path Size	No. of Paths	Scales	Range	Range	Range	Dimensions: L x W x H	Weight	Weight
2512	Grind Gage No. PD-250	1 x 6.25 in	2	µm	0 - 50 µm	0 - 250 µm		9.5 x 3.5 x 0.75 in	5 kg	11 lb
2513	Grind Gage No. PB-20	0.5 x 8 in		mil			0 - 20 mil	9.5 x 2.5 x 0.75 in	3 kg	6.5 lb

Delivery Content

Grind Block
 Scraper (2514)
 Storage Case