




PAUL N GARDNER COMPANY
9104 GUILFORD ROAD, SUITE H
COLUMBIA, MD 21046 USA

EMAIL: GARDCO@ALTANA.COM
PHONE: +1-954-946-9454

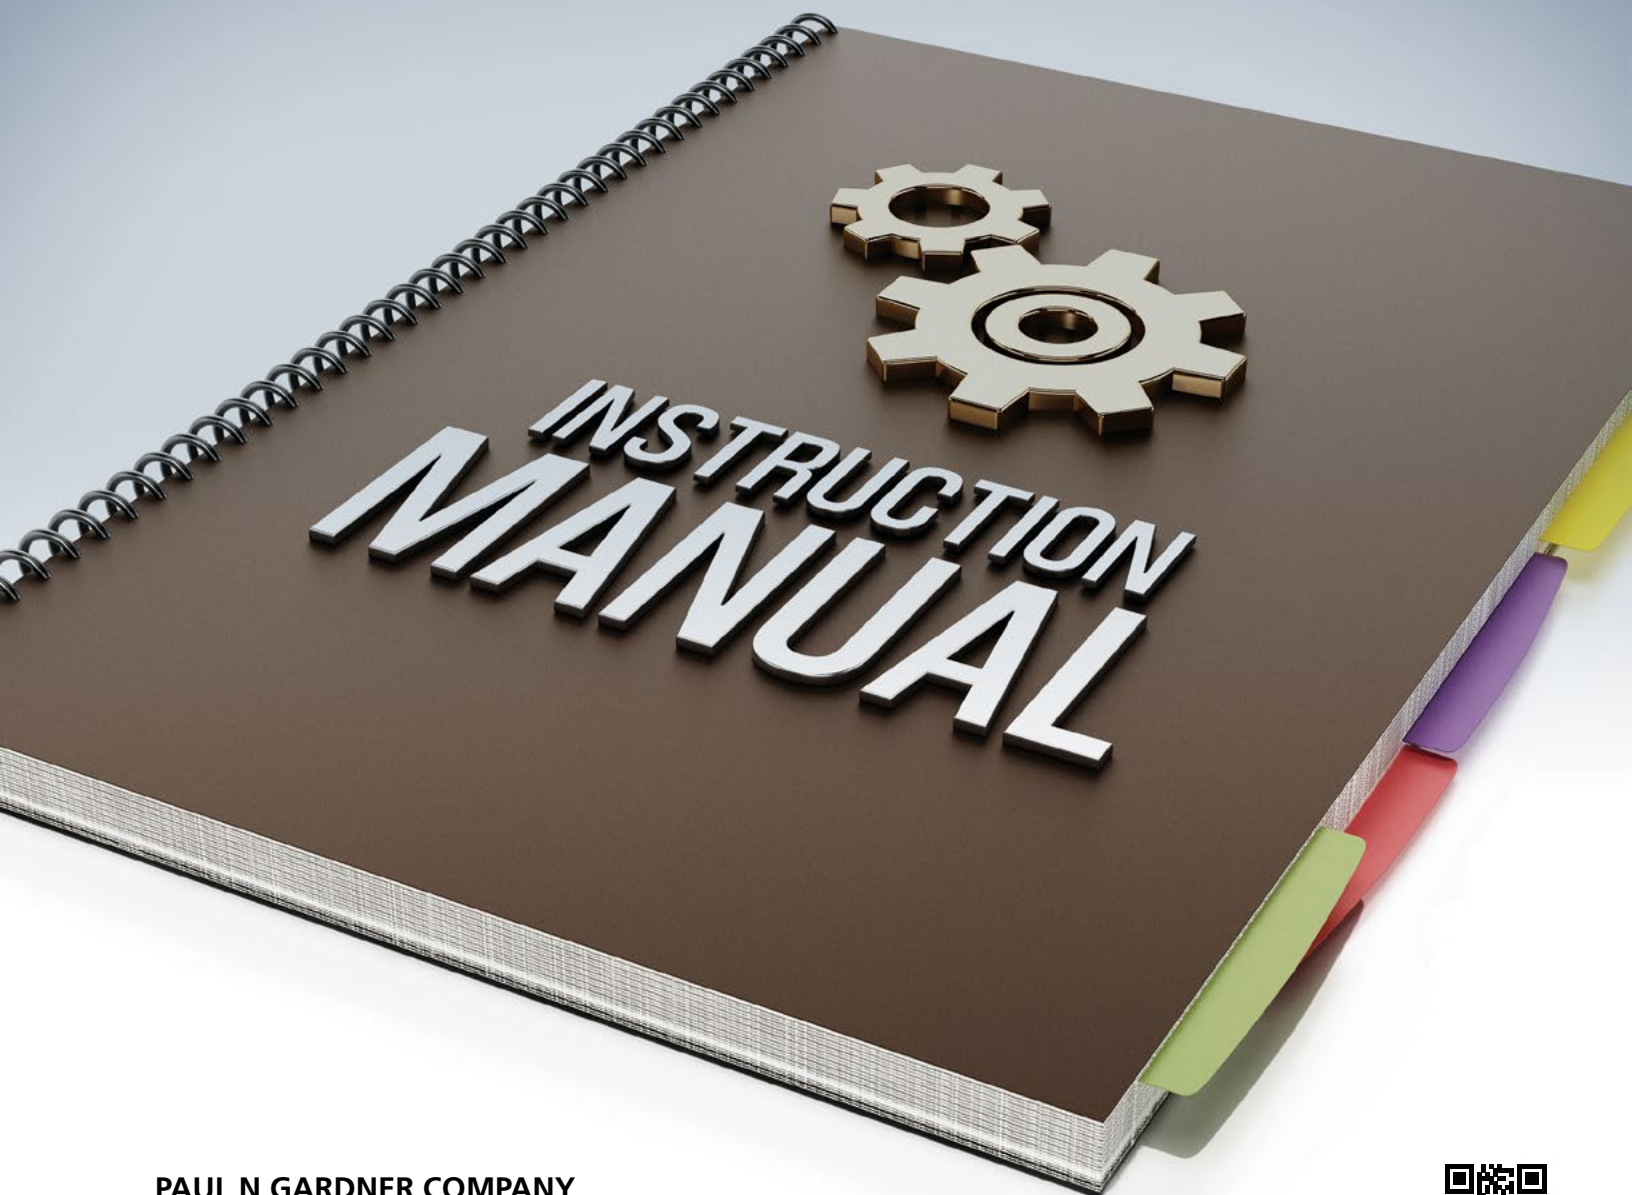

INSTRUCTIONS

GARDCO DISTRIBUTED PRODUCTS



Hotcake Wet Film Thickness Gauge

Quick Start Manual

INSTRUCTIONS FOR USE

1. The "Hotcake" paint thickness gauge consists of a circular aluminum disc with spaced calibrated notches, and recessed flat faces below the rim. The hole in the center allows the thumb and index finger to hold the gauge and roll it over easily across the wet paint film to be measured. The outer rim of the disc is completely wetted, while the inner flats, at depths from 1 - 100 mils (.001" - .100") are only wetted according to the coating thickness of the wet paint film.
2. Roll the "Hotcake" WFT gauge across the surface in a perpendicular position to wet the numbered faces below the surface of the paint film. After rolling the gauge (or slightly rocking when areas are small) inspect the notched faces. The wet film thickness lies between the highest non-wetted and wetted faces.
3. The "Hotcake" wet film thickness gauge should be cleaned immediately after use to avoid drying of the paint. Dried paint is more difficult to remove. Brush repeatedly with a stiff brush (tooth brush) using thinner or water depending on whether the paint is oil or water based.